

FTX-740

FiberMASTER OTDR



- Maximum dynamic range up to 42dB
- 0.8 m event dead zone, 2.5 m attenuation dead zone
- Intelligent link diagram, support Pass & Fail judgment
- iOLA, one-click Intelligent testing of passive PON networks

FiberMASTER OTDR

The FTX-740 offers superior performance thanks to a completely new algorithm, a large capacity battery and a 7in user-friendly screen. Ensure measurement quality and improve work efficiency, benefits include:

Full range selection

- Wide dynamic range 30-42dB
- Up to 2 OTDR models for selection
- Five optional modules to be customized

Advanced trace analysis

- Multi-trace analysis
- Bidirectional testing
- 4-points test

Not just OTDR

- VNC/GPS/WIFI
- OPM (Optical power meter module)
- SLS (Stabilized light source module)
- VFL (Visual fault locator module)
- RJ45 (Network Test module)
- FIP (Fiber connector end-face inspection module + analysis function)

*FIP module can first perform connector end-face detection and then OTDR link testing

Operability

- 7-inch color LCD touch screen
- Generate PDF reports quickly
- F/P analytical judgment function
- Smart map to analyze links graphically

Strong reliability

- Up to 12h battery life
- Minimum sampling resolution 0.04m
- Maximum sampling points 250,000





Full range selection


FLUXNET FTX-740 comes with an iLOA test function that enables complex front-line test work with less-experience, to support a variety of applications, including installation and maintenance (I&M) of mainline fiber (core network, metropolitan area network, mobile forward, mobile back-haul) and troubleshooting of access networks and FTTx. And combines industry-leading OTDR technology with OPM, VFL, SLS, network testing and fiber end inspection capabilities in one powerful handheld device.

FLUXNET FTX-740 OTDR Models


Fiber type	Link type		Test application						
SM	Area	PON	Installation (measurement of live fibers and dark fibers)						
			Model/Description		Wavelength(nm) Dynamic range(dB)				
	Acces network / Metropolitan area network	1x128	FTX-740-T3 (High dynamic range wavelengths + live model)		1310 42	1550 41	1625 40		
MM	LAN		FTX-740-Q1 (SM&MM model)		850 20	1300 22	+	1310 32	1550 30

FTX-740-T3

Maintenance models for real-time communication lines

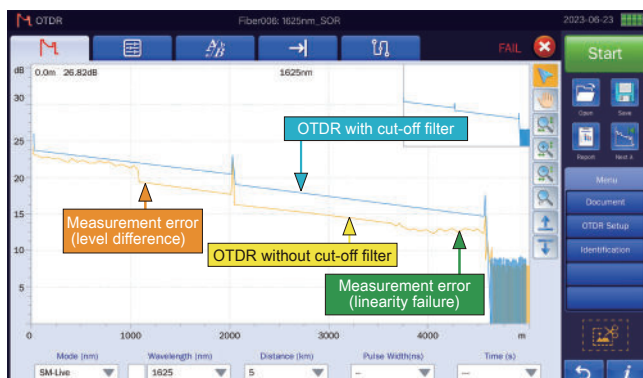


Real-time communication line trace

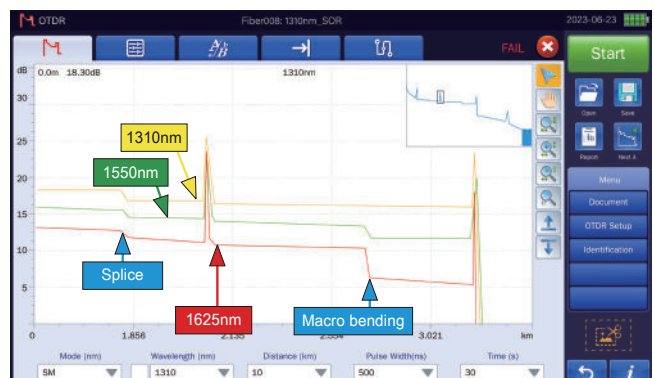

A trace with a macro bend

FTX-740-Q1

MM model

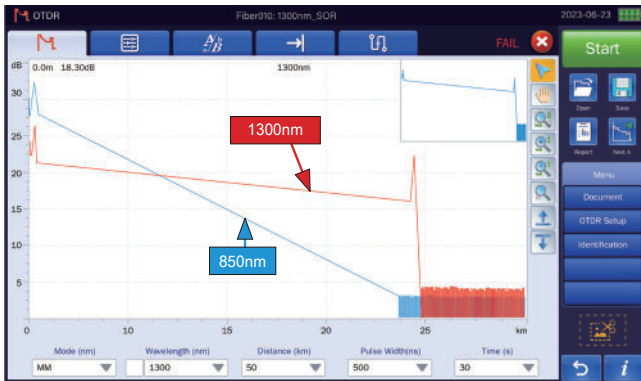

MM fiber trace

iOLA (Hawkeye)

OTDR faces a series of challenges:



Trace is wrong



Need to analyze several traces




The same work needs to be done twice



Requires complex instrument training

To address these challenges, FLUXNET has developed a better way to test fiber links: iOLA (Hawkeye) is an OTDR-based application designed to simplify the OTDR testing process by eliminating the need to configure parameters, analyze and interpret multiple complex OTDR curves. It adopts advanced algorithm, can dynamically define the test parameters, and according to the measured network to determine the appropriate curve acquisition times; Multiple pulse widths at multiple wavelengths can also be correlated to locate and identify faults with very high resolution - all at the touch of a button.

Working principle

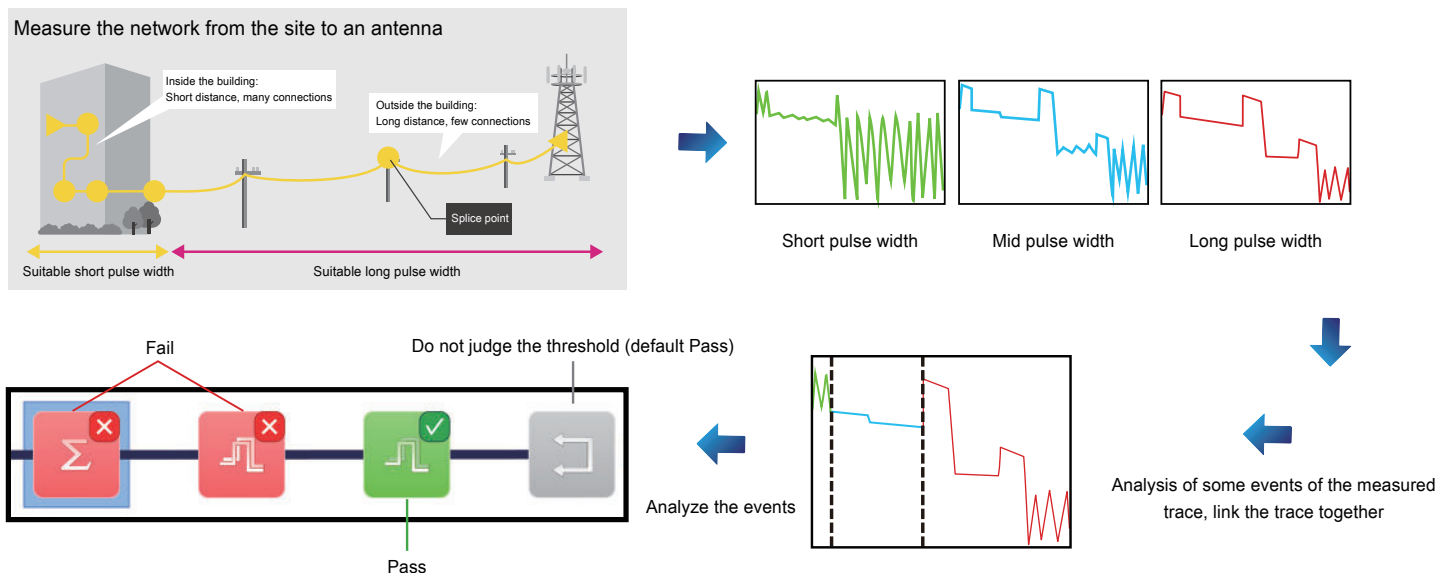





Operability

7.0 inch multi-touch capacitive touch screen

It supports new gestures to amplification. The screen capture color is clear. The interface design is simple and clear.

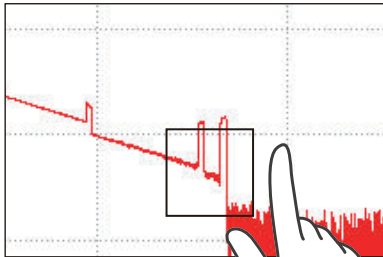

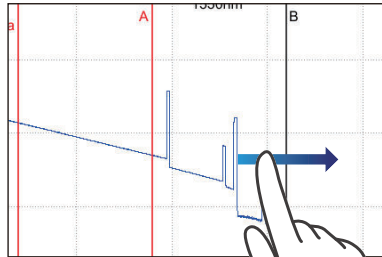

Fragment selection
Amplify the trace





Drag
Move the cursor




Expand the trace display area

By tapping the icon   , you can enlarge the trace display area to view more detail.

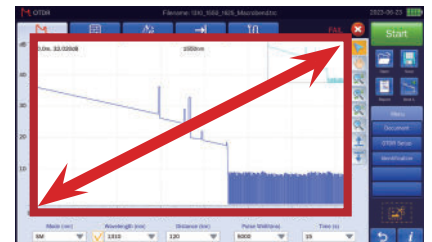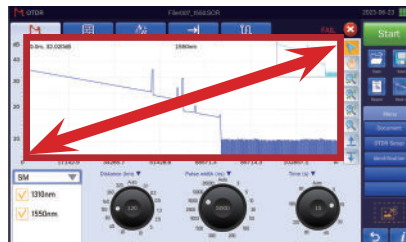


Quickly generate the PDF report

Built -in post -processing software to generate reports of PDF format.

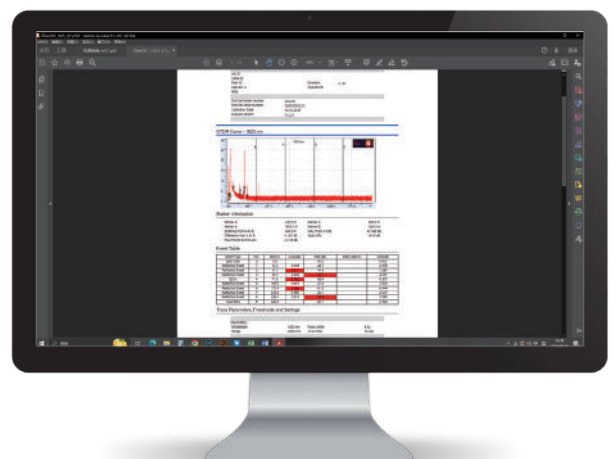

Pass & Fail analysis function

Automatically perform Pass/Fail judgments for each event based on pre-specified thresholds. The measurement results can be viewed through the result display items (As shown in the red box on the following side).

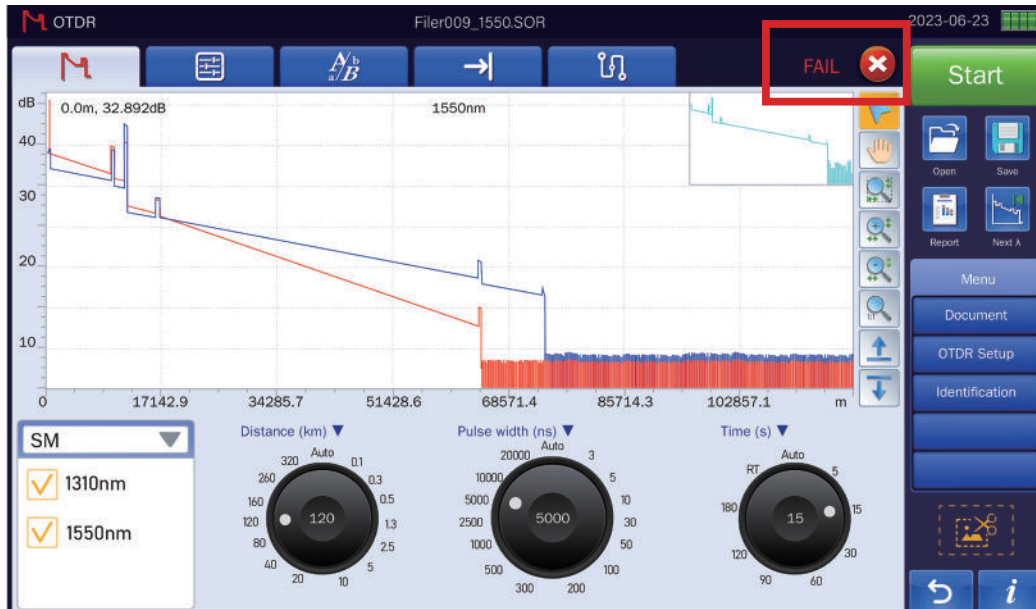

Smart map analyze links graphically

With Smart Map, users only need to press one button to execute measurement, detect network events and execute Pass&Fail judgment. It includes a simple icon view that facilitates the location and type of the event, and automatically executes the Pass&Fail judgment of each event based on the pre -specified threshold.




Advanced trace analysis

The OTDR master module is capable of performing advanced analysis of measured data


Multi-trace analysis

View multi -trace, can view up to 4 traces at the same time, comprehensive analysis, and the results are more accurate.

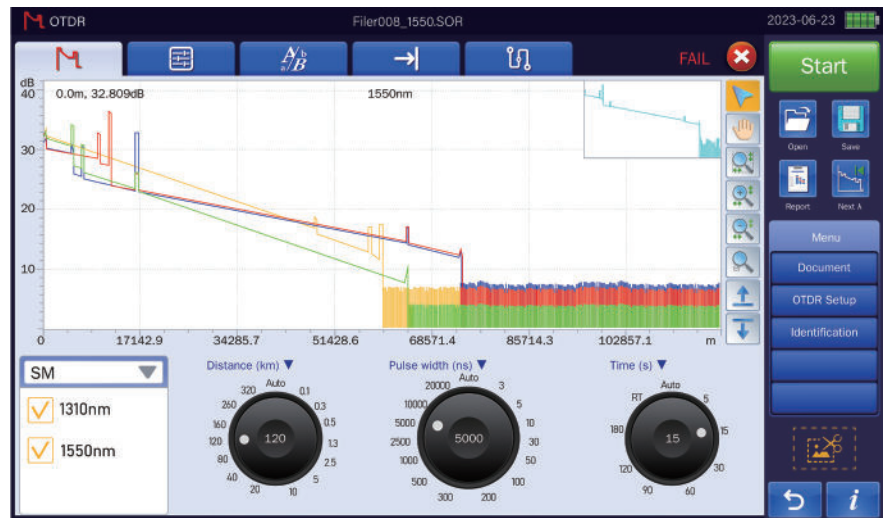

Bidirectional testing

Averaging values obtained from opposite directions provides a more accurate quantification of losses. Bidirectional testing is a great way to improve test integrity in long-distance applications.

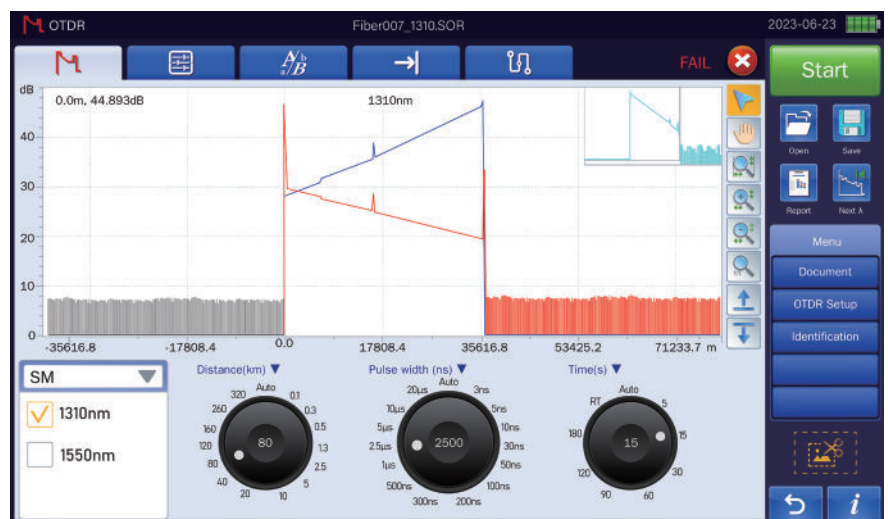

4-points testing

Real-time monitoring of splicing and insertion loss, less noise impact, more accurate test results.



Strong reliability


10x3m Jumper Test

Short distance testing:

Accurately test events and loss



Minimum sampling resolution 0.04m
Maximum sampling points: 250,000

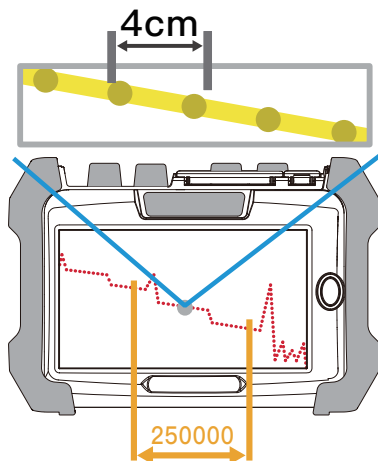

Battery working time: 12 hours



Rubber sheath design: effective shock absorption, anti-fall and anti-bump





Not just OTDR


OPM module (built-in)

Used to measure absolute optical power or the relative loss of optical power through a section of fiber link




SLS module (built-in)

Output stable continuous signal, used in combination with an OPM to measure optical loss in fiber optic systems

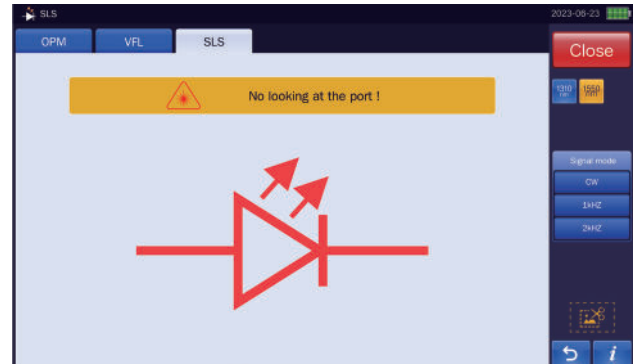


VFL module (built-in)

Luminous stability, strong light source, strong penetration; Two light source modes - steady on, flashing

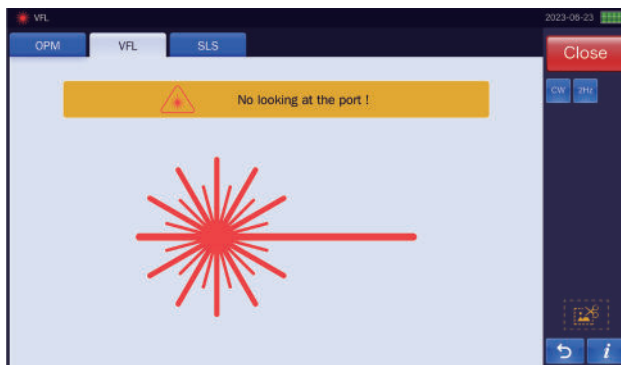

Network test module (built-in)

Network sequencing + Network ranging + Network hunting (optional)


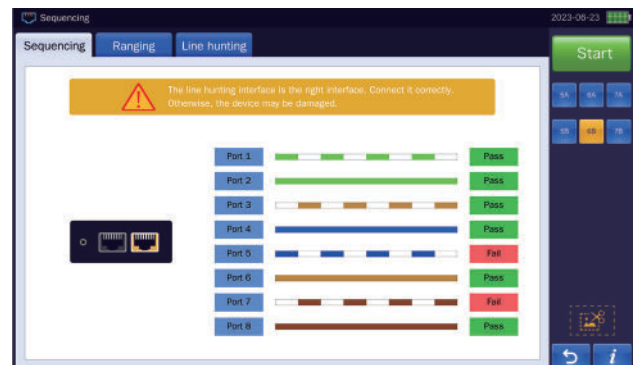


Fiber connector inspection module (built-in)

The fiber connector end-face inspection module can visualize the surface of the connector, and combine with handle probe(optional) can automatically analyze the scratches and dust on the fiber connector, save the surface image and judge the result. And offer a PDF report




*FIP module can first perform connector end-face detection and then OTDR link testing

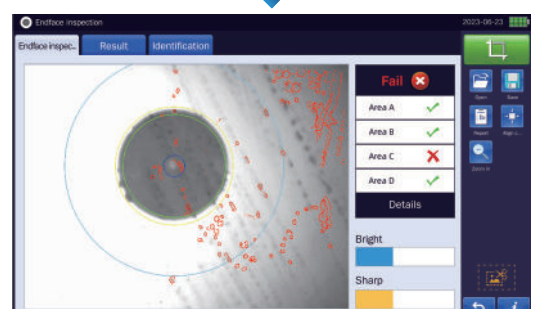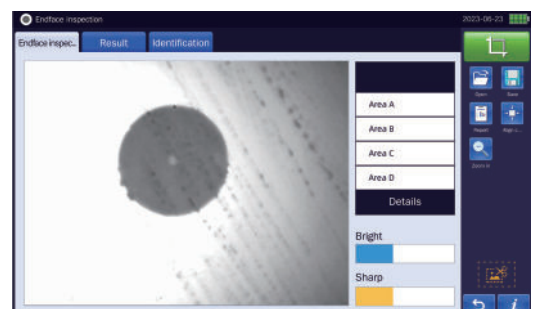

Fiber connector detection result

GPS (module optional)


Real-time positioning OTDR position and running track

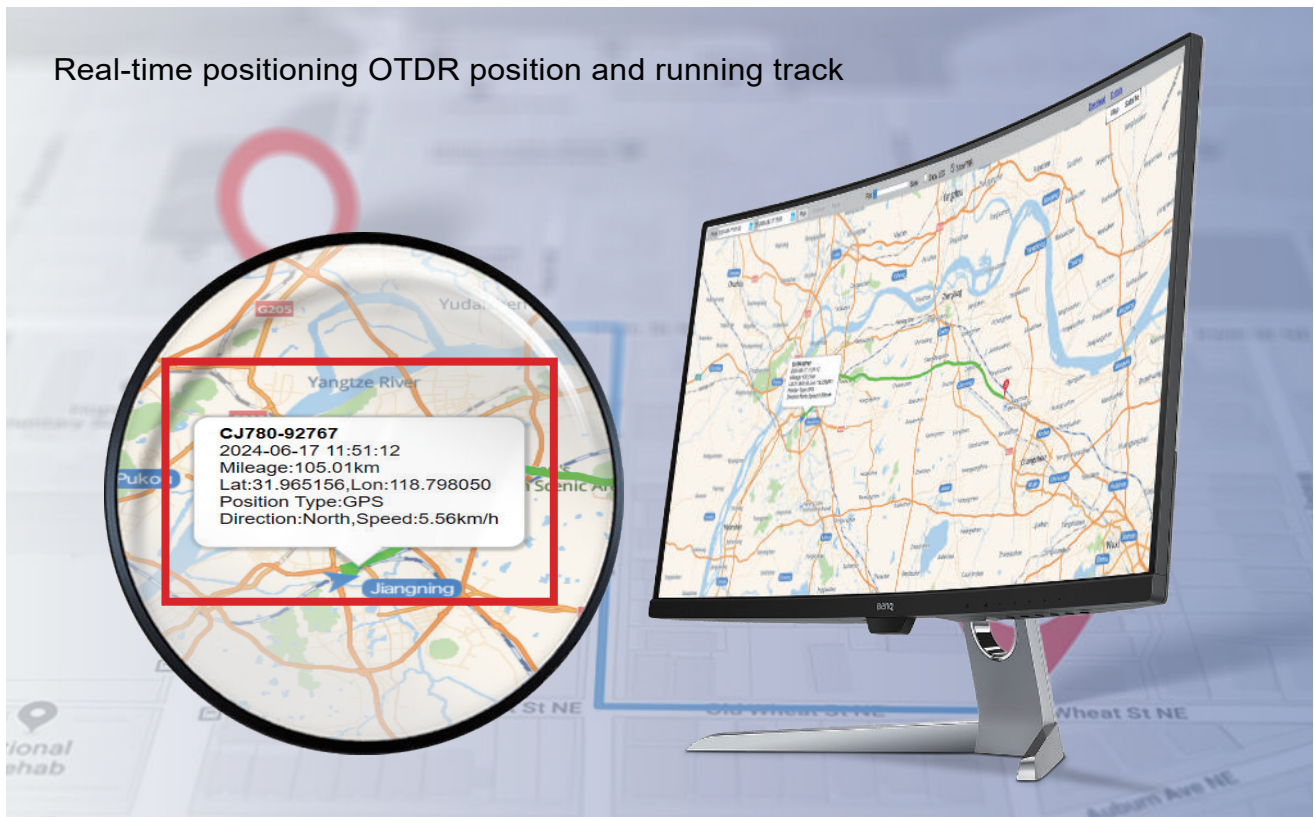

WIFI remote control (built-in)

VNC remote control function, using mobile phones or computers online remote operation OTDR easily solve the remote work, can simultaneously take into account multiple room testing, greatly improve efficiency.

Office

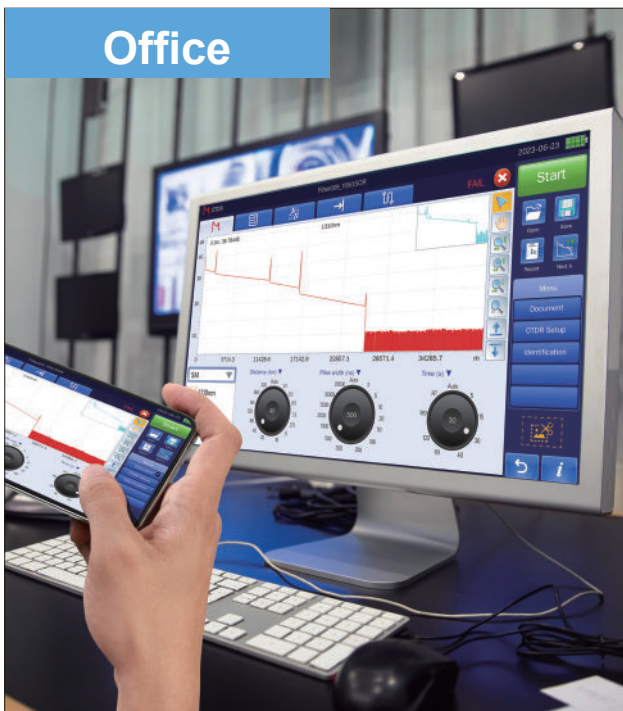

Server Room







PON optimization

Quickly, easily and correctly measure networks with large losses, such as PON links. In PON mode, simply select the route configuration to be measured on the screen, and OTDR will automatically determine the appropriate measurement conditions and set the optimal value, even after the optical splitter caused large losses, the FTX-740 OTDR can ensure high trace quality.

Measuring a residential PON network with two-level splitters

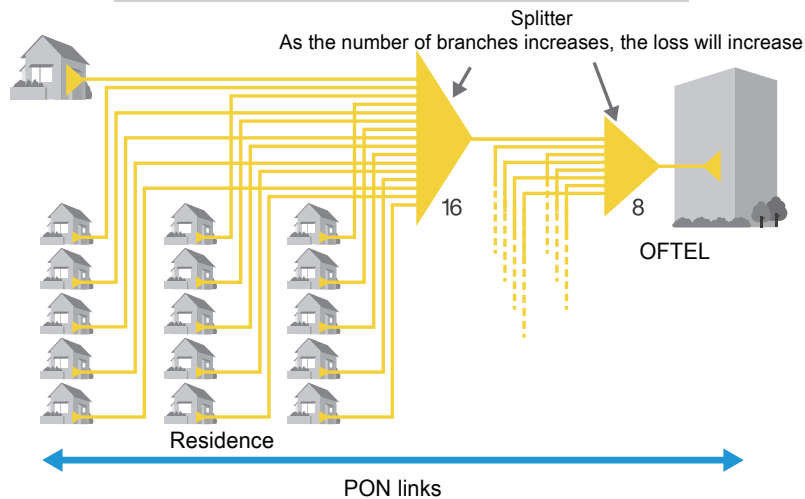

Set the parameters of the splitter to be measured in PON mode

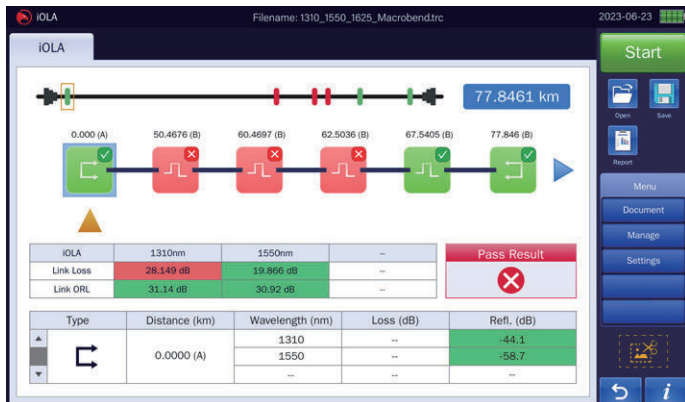


Ultra-high signal-to-noise ratio measurement



Measuring total 1:128 splitter

Measuring total 1:128 splitter

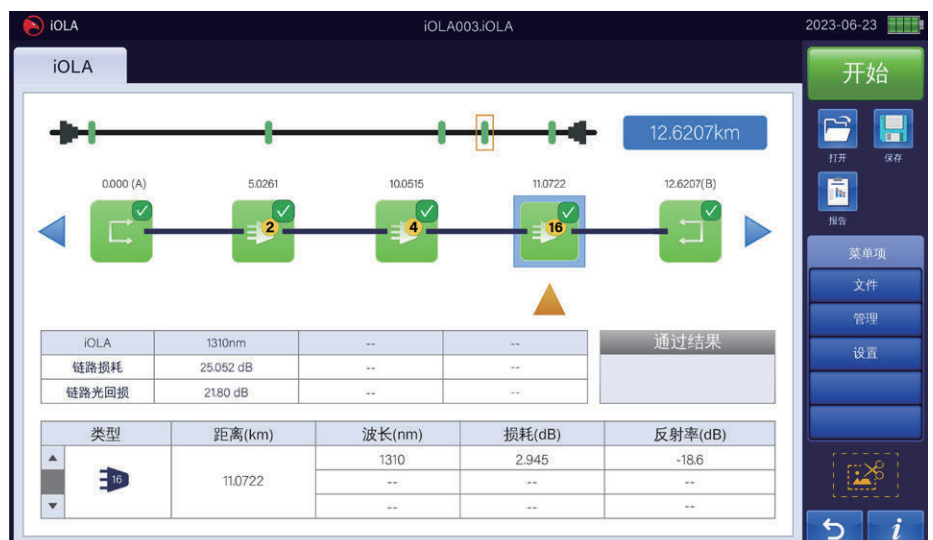




Additional function


Self calibration

Shorten maintenance time and reduce maintenance costs

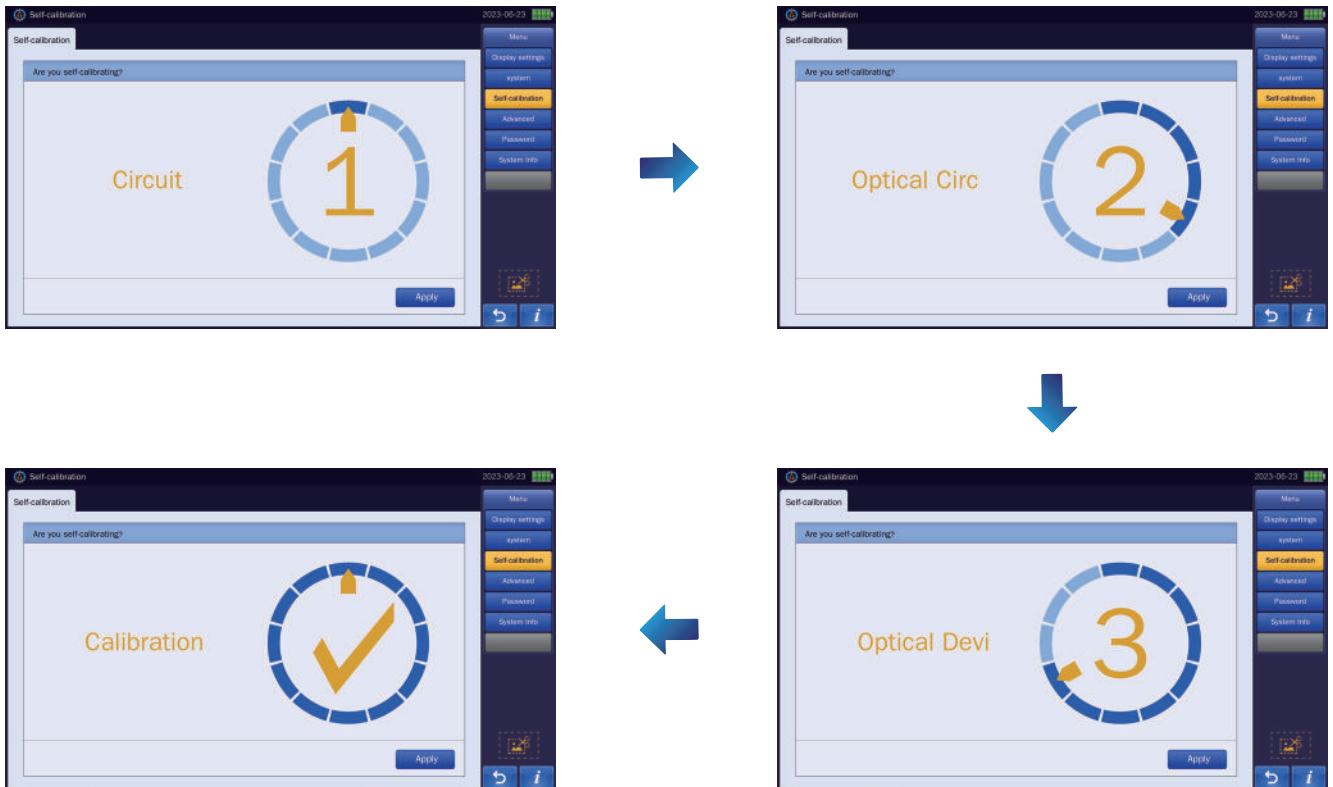


Power-on password

Acquire and use OTDR by means of leasing, paying in installments according to the agreed time and amount

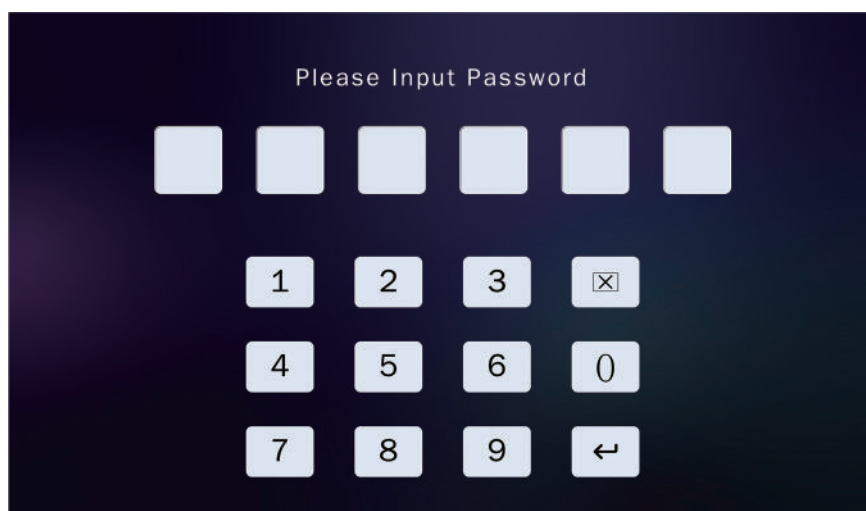



Appearance

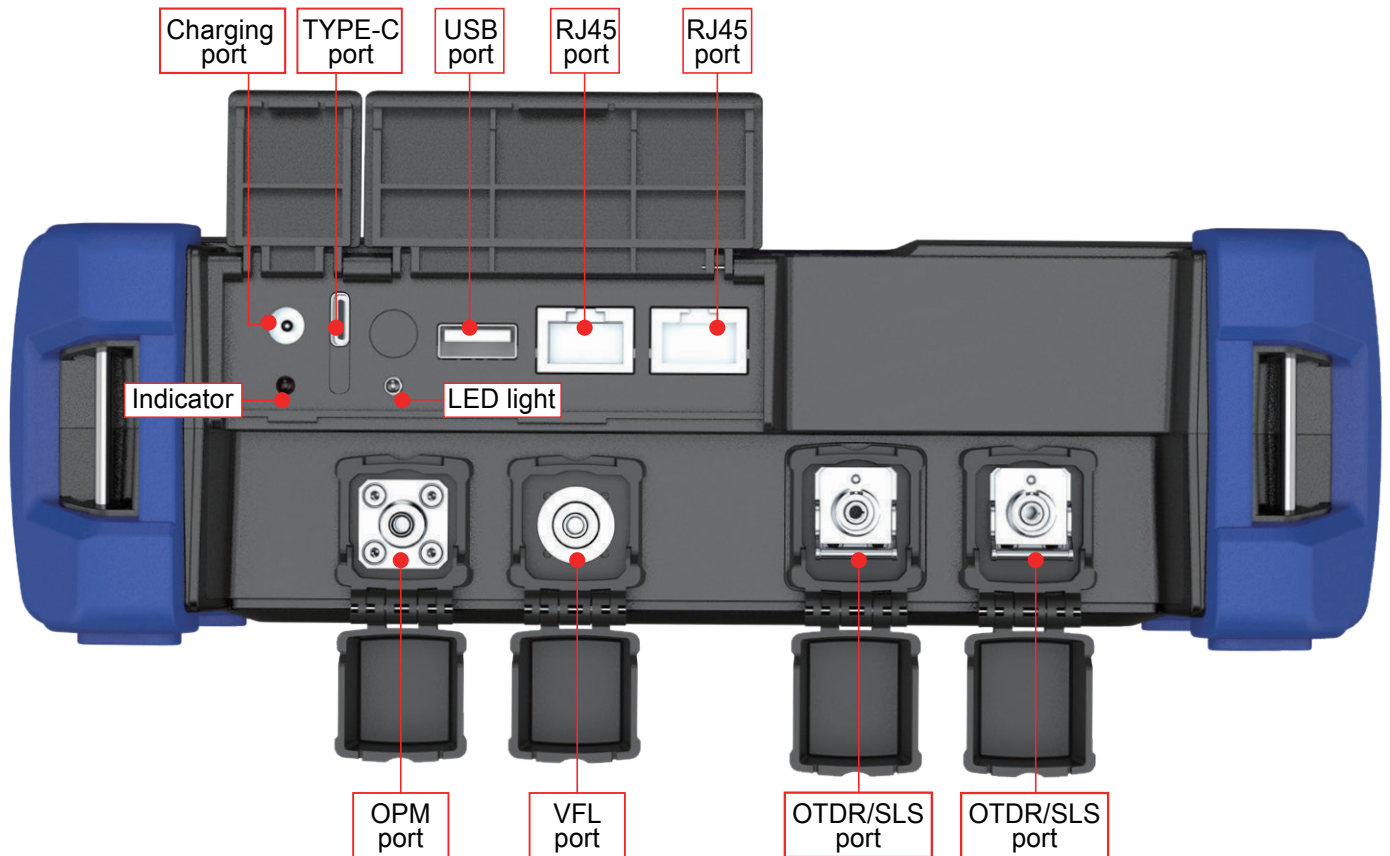

Packaging configuration



(Touchpen is equipped inside the box and needs to be installed by self)



OTDR Specifications

OTDR module

Model		FTX-740-T3	FTX-740-Q1
Wavelength (nm)		PON 1310/1550/1625 (built-in filter)	850/1300+1310/1550
Dynamic range (dB)		42/41/40	20/22 32/30
Number of optical port		1	2
Event dead zone★① (m)		1	SM≤1; MM≤1.5
Attenuation dead zone★② (m)		3	SM≤3.5; MM≤5
Multi-fiber Measurement		√	√
Multi-pulse Measurement		√	√
Splitters Measurement		Max 1:128	Max 1:32
Applicable fiber		SM (ITU-T G.652)	SM + MM
Distance range (km)		0.1, 0.3, 0.5, 1.3, 2.5, 5, 10, 20, 40, 80, 120, 160, 260, 320	
Pulse width (ns)		3, 5, 10, 30, 50, 100, 200, 300, 500, 1000, 2500, 5000, 10000, 20000	
Number of sampling points		Max 250000	
Sampling resolution		Min 0.04m	
Distance measurement accuracy		±(0.75 m + Measurement distance × 2 × 10 ⁻⁵ + Sampling resolution)	
Loss measurement accuracy		±0.03 dB/dB	
Return loss measurement accuracy		±2 dB	
Optical Power Meter Module (Built-in)		√	
OPM	Wavelength	800 ~ 1650nm	
	Measure range	-70 ~ +6dBm	
	Measure accuracy	< (±0.2dB or ±5%)	
	Display resolution	0.01dB	
	Optical input port	Customized Cconnector	
Stabilized Light Source Module (Built-in)		√	
SLS	Wavelength (nm)	1310/1550/1625	850/1300+1310/1550
	Output power	≥-10dBm	
	Modulation mode	CW, 270 Hz, 1 kHz, 2 kHz	
	Laser class	Class 1M or Class 1	
	Optical input port	OTDR port	
Visual Fault Locator Module (Built-in)		√	
VFL	Wavelength (nm)	650±10nm	
	Output power	10mW	
	Modulation mode	CW, CHOP (2 Hz)	
	Laser class	Class 3R	
	Optical input port	Customized Cconnector	
Fiber Inspection Probe (Optional)		Optional	
FIP	Pass / Fail	√	
	Magnification	400X	
	Resolution(um)	≥1.0	
	Electrical interface	USB2.0	
	Optical Connector	Customized Cconnector	
	CMOS size	1/3 inch	
RJ45 Networks Test (Built-in)		√	
RJ45	Applicable cable	CAT5, CAT6	
	Distance of Cable Collationl	300m	
	Distance of emitting signal	300m	
GPS Module (Optional)		Optional	
GPS	Location accuracy	< 50m	
	Real-time Monitoring	support	
WIFI Module (Built-in)		√	
WIFI	Data transmission	√	
	Remote Control	√	



OTDR Specifications

General Specifications	FLUXNET FTX-740-T3	FLUXNET FTX-740-Q1
Link Map	√	
Pass/Fail judgment	√	
Distance unit	m, km, mile, kf	
PC Analysis Software	√	
Languages	English, Español, Chinese, Português, Français, Русский, ไทย, 한국어	
Optical connector	SC/APC	SM : SC/APC, MM : SC/UPC
Display	7-inch touch screen (Resolution: 1024 × 600)	
Port	Charge port × 2, 12V - 2.5A & Type C	
Operating temperature	-10 ~ 50°C (0 ~ 40°C when AC adapter is being used. 0 to 35°C when battery is be charged)	
Storage temperature	-20 to 60°C	
Altitude	4000 m	
Humidity	0 to 90% RH (20 to 90% with 739874 AC adapter, non-condensing)	
Power requirements	100 - 240V AC, 50/60Hz (AC adapter)	
Battery	7.4V, 10500mAh, ≥77Wh	
LED Light illumination	>15000mcd	
Operating time★③	12 hours	
Data storage	Internal storage: ≥10000 traces, External storage: USB memory	
Dimensions	232 mm (W) × 161 mm (H) × 70 mm (D)	
Weight	1.6 kg (including internal battery and protectors, excluding OTDR unit and options)	

Notes:

- ★①. Minimum pulse width, return loss: ≥55 dB (≥40 dB for 850/1300 nm), group refractive index: 1.5, the unsaturated peak level <1.5dB.
- ★②. Minimum pulse width, group refractive index: 1.5, the backscatter level is >0.5dB of the normal level. For SMF, at 1310nm, return loss: ≥55dB. For MMF, at 850nm, return loss: ≥40dB.
- ★③. New Battery

All specifications valid at 23°C ± 2°C (73.4°F ± 3.6°F) unless otherwise specified.